



IC HOME

Dinger Pro 2

5MP Wi-Fi Video Doorbell

The IC Home Dinger Pro 2 offers crisp 5MP QHD+ video and a super-wide field of view, so you can see more of what's happening at your doorstep. It features built-in IR night vision and a white-light illuminator to help deter unwanted visitors. Setup is quick and easy using the IC View Pro app, where you can watch live or recorded video, talk to visitors with two-way audio, and get instant alerts sent right to your phone.



Dual-band WiFi Support




Night Vision



2-Way Talk



Pairs with Singer 2



Human Detection




Micro SD Support



IP65 Rated



H.265

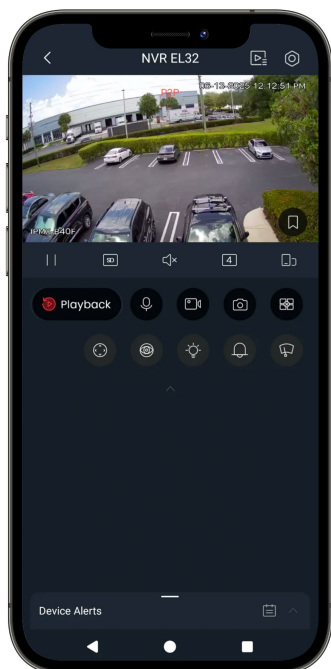

Stay Connected To What Matters.


The Singer 2 integrates seamlessly with IC Realtime's IC View Pro app, enabling unified access to both IC Home and IC Realtime core surveillance products within a single platform.

With a new, intuitive UI design, easily access Live View, Playback, control PTZ cameras and easily share devices- all from one app.

Powered by:



Dinger Pro 2

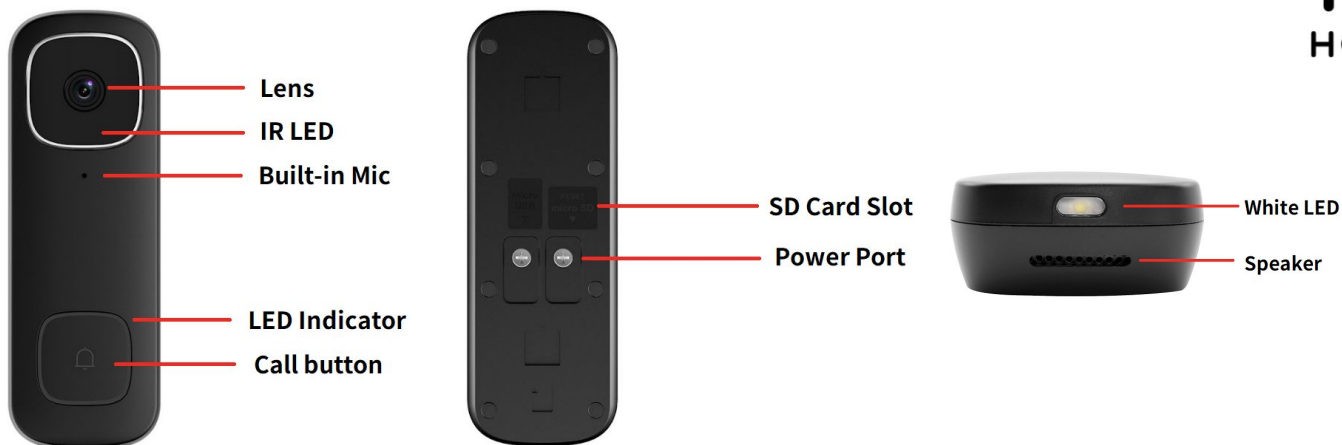

Technical Specifications

Camera

Image Sensor	1/2.7-in. Progressive-Scan CMOS
Lens	2.2 mm fixed lens
Effective Pixels	5MP (2560 x 1920)
IR Distance	16.5ft (5m)
White LEDs	2, Programmable
Field of View	H: 124°, V: 92°, D: 164°

Video & Audio

Resolution	2560 x 1920, 1440 x 1080, 640 x 480
Video Compression	H.265, H.264
Audio Compression	G.711A, G.711Mu, PCM
Frame Rate	Main Stream: 2560 x 1920 at 15 fps
	Sub Stream: 640 x 480 at 15 fps
2 Way Talk	Built-in Mic & Speakers
Audio Features	Customizable call responses

Wi-Fi

2.4 GHz	IEEE802.11b/g/n • 2400 to 2483.5 MHz, RF POWER ≤30 dBm
5 GHz	IEEE802.11a/n/ac • 5150 to 5350 MHz, 5470 to 5725 MHz, RF POWER ≤24 dBm • 5725 to 5850 MHz, RF POWER ≤30 dBm

Events and Notifications

Supported Events	Call Notification
	Human Detection
Notifications	IC View Pro App (iOS, Android)

Storage

Micro SD Slot	Supports up to 256GB Micro SD Card
Compatibility	IC Realtime NVR's and HDVR's

General

Mount	Horizontal & Vertical Brackets Included
Chime Support	Mechanical or pairs with Singer 2
Power Supply	12 VDC to 24 VDC or 16 VAC to 24 VAC, 0.8 A USB (5 VDC±5%, 2 A) ²
	5 VDC: 2.3 W, Maximum: 3.3 W
Power Consumption	12-24 VDC: 2.9 W, Maximum: 4.8 W
	16-24 VAC: 2.9 W, Maximum: 4.9 W
Operating Conditions	-20° C to +50° C (-4° F to 122° F), Less than 95% RH
Ingress Protection	IP65
Dimensions (L x W x H)	5.12 in. x 1.77 in. x 0.88 in. (130.0 mm x 45.0 mm x 22.50 mm)
Weight	0.24 lb (0.11 kg)
Certifications	CE, FCC

What's Included:



Video Doorbell



Mounting Bracket



Angled Bracket (15° Horizontal)



Angled Bracket (15° Vertical)



Chime Kit



Installation Kit